


# FluoroPro Overflow Assembly

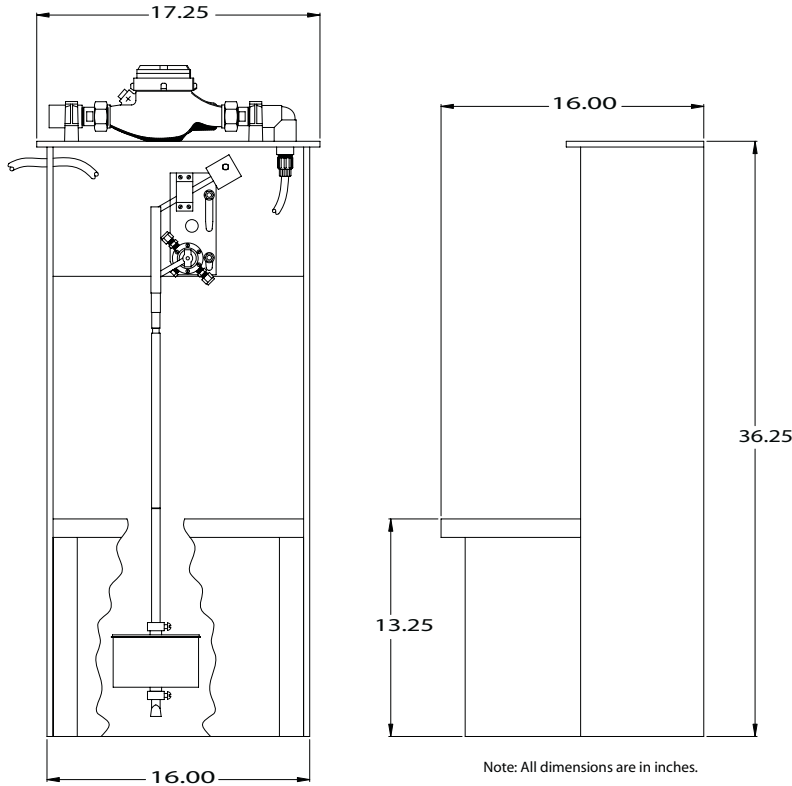

Fluoride Saturators refill on a continuous, as needed, basis. Because of this, standard methods of secondary containment do not always provide adequate protection against overflows. The FluoroPro Overflow Assembly provides this extra measure of protection in a pre-engineered package.

The FluoroPro Overflow Assembly is piped directly to the saturator and in the event of an overflow will act as secondary containment and mechanical water shut-off. As the overflow tank fills, the float valve will rise. Once the level in the overflow tank is high enough the mechanical valve will shut off make-up water flow to the Saturator. This unit can also be fitted with audible or visual alarm indicators to provide operators with instant notification of an overflow condition.

The FluoroPro Overflow Assembly is available as a standalone unit or can be incorporated into a single prefabricated Saturator, Overflow and Containment assembly for the highest level of overflow protection.

## Product Specifications

<b>Piping Connections</b>	1/8" NPT
<b>Pressure Rating</b>	0-300 psi
<b>Temperature Rating</b>	Water: to 180°F.
<b>Materials</b>	Brass, Stainless Steel, Monel Buna N® Float linkage and float rod: Brass and PVC Polypropylene
<b>Adjustment Range</b>	
Level Differential	1" min to 18" max. with PVC rod

## Features

- Accurate Liquid Level Control
- Fully Hydraulic Operation
- Simple Design, Easy Maintenance
- No Lubrication Necessary
- No Gears, No Mechanical Linkage Between Valve and Control

**800-378-1500**

**Northeast Pump & Instrument**

[www.npipump.com](http://www.npipump.com)

190 Summer Street, Lunenburg, MA 01462