

Yamada®

Powder Pump



Series BH-2

Yamada Powder Pumps were specifically designed to move bulk solids more effectively throughout your process. They are a cost effective replacement for Augers and Conveyors and eliminate unsafe and labor intensive means of moving bulk powders. These heavy duty pumps consistently transfer fine-grained (100um or finer), low bulk density (5 to 50 lbs. / cubic foot), dry powders in a dust-free operation.

Yamada offers a base unit specifically for light powders

Series BH-1:

- 1-1/2" to 3" port sizes
- Aluminum, Cast Iron, or 316 Stainless Steel housings
- Sweeping one piece manifolds
- Solid 316 Stainless Steel center shaft
- Patented non-lubricated, non-stalling air valve technology
- Bolted mating surfaces
- Portable
- Conveys up to 7 cubic feet per minute (3" model)
- Vacuum Activated Aeration Valve mounted to **Suction** manifold


Series BH-2:

- Includes all of the above features and...
- Compressed air induction system fluidizes all four check valves while the pump is operating

Series BH-3:

- Includes all of the above features and...
- Independent port for inert gas fluidization rather than compressed air
- Delay timer to begin fluidizing check valves 1-60 seconds prior to the pump starting AND 1-60 seconds after the pump stops

Series BH-3

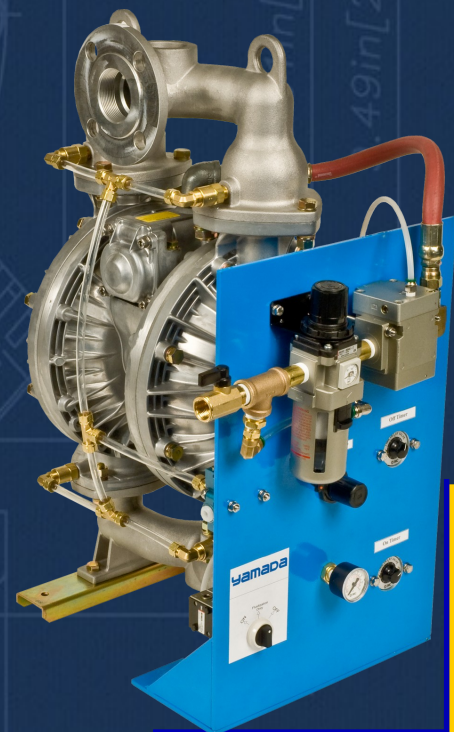

Consult Yamada for a "pumpable powders" specification sheet
Form# PP0802

The Proof's in the Pump

CALL TOLL FREE 800.990.7867

Yamada America, Inc.
955 East Algonquin Rd
Arlington Heights, IL 60005
Phone: 847.631.9200
Fax: 847.631.9273
www.yamadapump.com
sales@yamadapump.com

Applications

Activated carbon	Diatomaceous earth	Pearlite	Pyrogenic & precipitated silicic acid
Acrylic resins	Expanded mica	Pesticides	Quartz powder
Aluminum oxide	Fire-extinguishing powder	Pharmaceuticals	Salicylic acid
Bentonite	Fumed silica	Pigments	Silicones
Carbon black	Ground limestone	Powder coatings	Starch
Cereal flours	Kaolin	Powdered plastics	Talc
Clay powder	Micro dolomite filter dust	Powdered rock	Toners



Specifications:

- Conveying distance depends upon the micron size and the bulk density of the powder. For example fumed silica can be conveyed 150 feet while flour a maximum of 40 feet. Refer to the Yamada "pumpable Powders" data sheet for specific materials.
- Powder must be 150 mesh (106 micron) or smaller size particle / powder and dry. The Pump will not pump crystals or flakes and the bulk density should be less than 50lbs / cubic feet. The higher the bulk density, the shorter the conveying distance and the lower the flow rate.
- The Pump can be located a maximum of 15 feet above powder source.
- Yamada recommends aeration / fluidization of the powder a minimum of 10 to 15 seconds prior to starting the pump- premature diaphragm, center shaft, and center disk failure can be avoided.
- Teflon® check balls are recommend for sticky powders.
- Air volume requirements & capacity:
 - NDP-40 (1-1/2" port): = 15 to 90 SCFM. Maximum flow rate: 144 cubic feet/hr, 2.4 cubic ft/minute
 - NDP-50 (2" port): = 20 to 105 SCFM. Maximum flow rate: 210 cubic feet/hr, 3.5 cubic ft/minute
 - NDP-80 (3" port): = 30 to 120 SCFM. Maximum flow rate: 420 cubic feet/hr, 7.0 cubic ft/minute
- Yamada recommends regulating compressed air to 70PSI Maximum.

Note: Add the kit # to the standard Yamada nomenclature when ordering.
 Example: NDP-50BAC-BH-2 for a 2" Aluminum Pump with Neoprene elastomers & Series-2 Powder features.

The **Proof's**
in the **Pump**

Yamada®

Kit #	Description
BH-1	Kit includes Vacuum Actuated Aeration Valve on Suction Side of Pump
BH-2	Kit Includes Vacuum Actuated Aeration Valve on Suction Side of Pump & Air Induction System at Check Valves
BH-3	Kit includes Vacuum Actuated Aeration Valve on Suction Side of Pump, Air Induction System at Check Valves, Inert Gas Port Option, & Time Delay Pump Purge.

Your local distributor:

REV: DATE: DESCRIPTION:

THE DWG. OF:

Form# BH0309

Note: Due to Yamada's continued commitment to product improvement, specifications may change without notice. Teflon® is a registered trademarks of DuPont Dow Elastomers